


# Vapor Systems Technologies, Inc.

## High Flow 1" Diesel Hose & Breakaway System

### VST Warranty Tracking

- All VST products carry VST's individual serial numbers with warranty information available online with VST's "*Elite*" tracking system.

	<b>Vapor Systems Technologies, Inc.</b> Phone: (937) 252-8969 Fax: (937) 258-8772 www.vsthose.com
	SERIAL NO. _____ DISTRIBUTOR NAME: _____ INSTALLATION DATE: _____ INSTALLATION SITE: _____
12 month warranty becomes effective at time of installation. If the card is not returned, warranty becomes effective from date of shipment from VST. The maximum warranty life is 18 months from date of shipment. Please call VST if this hose is being used as a replacement. Replacement with a non VST product voids any warranty.	

**Return Warranty Card and the 12 Month Warranty is from Date of Installation**  
 (Maximum 18 Months from Date of Shipment)

### VST 1" High Flow Diesel Hose

- The built-in permanent double swivels offer superior handling and reduces hose flex stress which translates into longer service life.
- The VST design eliminates the need for adding swivels that contribute to low flow rates as well as increased system cost.
- The swivel assemblies are UL listed.

### 1" Diesel Hose Specifications

- Tube:** High grade nitrile handles all types of gasoline, diesel and blended fuels including MTBE and ethanol additives
- Cover:** Nitrile/Vinyl has superior abrasion, ozone and chemical resistance.
- Reinforcement:** Wire braid hard wall construction.
- Couplings:** 1" NPT electroless nickel plated brass swivels with permanently crimped inserts.
- Swivels:** VST's design maintains consistent compression in all fuels, temperature and service conditions.




All assemblies include VST's uniquely engineered spring loaded lip seal, that coupled with our bearing sleeve design, provides superior swivel performance.

### VST 1" Diesel Sentry Breakaway

- The Sentry snap back design features a unique "Finger Seal" that offers several advantages over currently available breakaways.
  - Compensates for most spike pressures.
  - Reduces nuisance breaks and protects the dispenser components.
  - Specially designed stay-put cushion sleeve protects both customers and equipment in the event of a drive-off.
- The Sentry retains its UL listing after field reconnection. Downtime is minimal even after a seemingly catastrophic event.



No special tools required  
 Just 10 pounds of force is needed to reconnect the breakaway

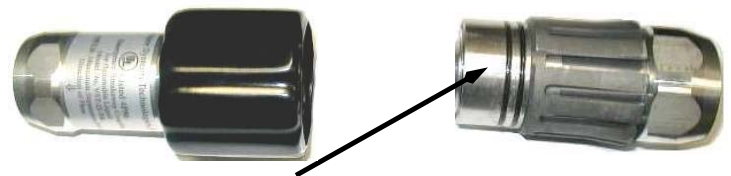

Double O-Ring Design  
 provides for leak-proof sealing of the breakaway  
 100% Pressure & Pull-Apart Factory Tested



Listed Products

650 Pleasant Valley Dr. Springboro, OH 45066  
 www.vsthose.com

1-888-VST-HOSE (878-4673) Phone 937-704-9333 Fax 937-704-9443

June 2002